




Solar Series-Tubular Gel

20 OPzV2500(2V3250Ah)

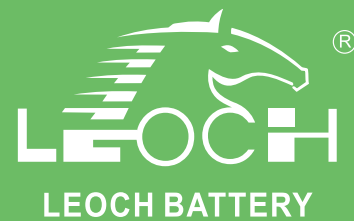


Specifications

Rated Voltage	2V	
Nominal Capacity	3250Ah	(C ₁₀₀ , 1.80V/cell)
Dimension	Length	487mm(19.17 in.)
	Width	212mm(8.34 in.)
	Container Height	772mm(30.39 in.)
	Total Height	807mm(31.77 in.)
Approx Weight	196.0Kg (432.11 lbs)	
Terminal	M8	
Container Material	ABS	
Rated Capacity (25°C)	3372.0 Ah	(120hr, 28.1A, 1.80V/cell)
	3250.0 Ah	(100hr, 32.5A, 1.80V/cell)
	3124.8 Ah	(72hr, 43.4A, 1.80V/cell)
	2500.0 Ah	(10hr, 250.0A, 1.80V/cell)
Max. Discharge Current (5s)	20000A	
Internal Resistance(25°C)	Approx.0.25mΩ	
Operating Temp.Range	Discharge	-20°C~55°C (-4°F~131°F)
	Charge	0°C~40°C (32°F~104°F)
	Storage	-20°C~50°C (-4°F~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current(25°C)	625.0A	
Charge voltage(25°C)	Float	2.25V
	Temp. Coefficient	-3mV/cell/°C
	Cycle(Equalization)	2.35~2.40V
Effect of temp. to Capacity	40°C (104°F)	106%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C	



Layout

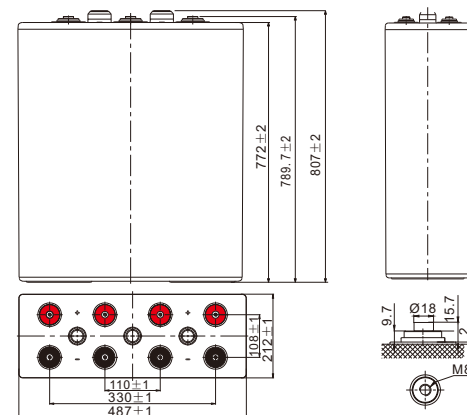

Constant Current Discharge (Amperes) at 25 °C (77°F)

F. V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	1117.3	755.5	580.0	396.8	278.1	234.3	111.3	58.2	41.8	31.7	27.3
1.80V/cell	1252.5	827.5	630.8	427.5	297.5	250.0	115.1	60.4	43.4	32.5	28.1
1.75V/cell	1302.3	856.3	645.2	436.1	302.5	254.3	115.8	61.8	44.5	33.2	28.5
1.70V/cell	1359.2	877.9	658.0	442.5	306.8	257.1	117.7	63.0	44.9	33.6	28.9
1.67V/cell	1394.8	892.3	670.2	449.7	310.4	259.3	118.8	63.6	45.3	34.2	29.3
1.60V/cell	1416.2	906.7	678.1	454.0	312.6	261.4	119.8	64.4	45.6	34.6	29.6


Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F. V/Time	1h	2h	3h	5h	8h	10h	24h	48h	72h	100h	120h
1.85V/cell	2156.3	1467.9	1131.3	779.2	551.2	465.7	222.4	116.4	84.0	63.7	55.0
1.80V/cell	2412.5	1604.6	1224.4	836.4	589.3	496.4	229.7	120.8	87.0	65.3	56.6
1.75V/cell	2490.8	1640.6	1245.9	850.7	597.9	503.6	231.0	123.4	89.2	66.5	57.3
1.70V/cell	2576.2	1676.6	1267.4	865.0	604.3	508.6	234.5	125.6	89.9	67.4	58.1
1.67V/cell	2626.0	1705.4	1288.9	872.2	610.1	512.9	236.3	126.8	90.6	68.5	58.7
1.60V/cell	2654.4	1719.8	1296.0	879.3	613.0	515.7	238.0	128.1	91.1	69.1	59.3



Solar Series-Tubular Gel

20 OPzV2500(2V3250Ah)

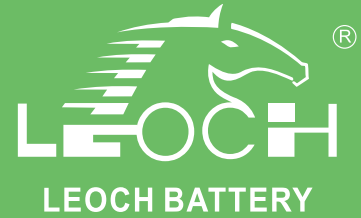

Applications

- Green energy systems (solar, wind, hydro, etc)
- Telecommunications installations
- Solar power stations
- Alarm installations
- Railway crossing
- Street lightening
- Pump systems
- Signal station
- Street signs
- Traffic lights
- Lawn lamp


General Features

- 20 years design life(20°C)
- Better recovery performance
- Wide working temperature range (-20~55°C)
- No electrolyte stratification provides longer service life
- High recombination efficient
- Build in copper core based in lead will carry large current
- Separator imported form AMER-SIL high porosity. PVC-SiO₂ and low resistance
- Pasted negative plate special grid design increase the active material. availability large current discharge and charge ability
- Tubuler type positive plate (polyester tube) prevent the active material from falling. Muti metal alloy pressed positive grid increase the anti corrosion ability and service life


Standards

- Compliance with IEC 60896, IEC 61427, DIN 40742 standards
- UL, CE Certified
- Manufactured in Leoch@IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


Charge voltage vs ambient temperature curve

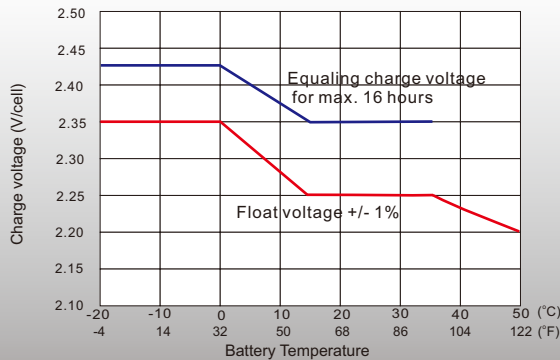


Temperature effects in relation to battery capacity

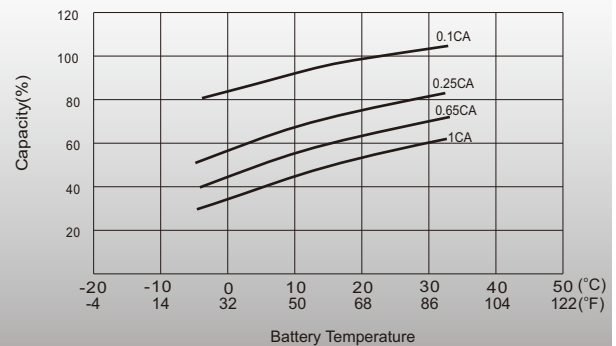

Cycle Life in Relation to DOD

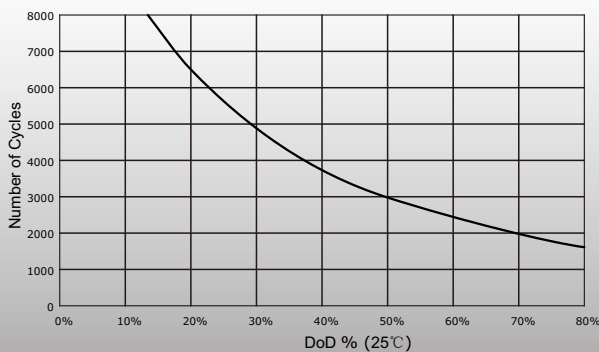

General Relation of Capacity VS. Storage Time

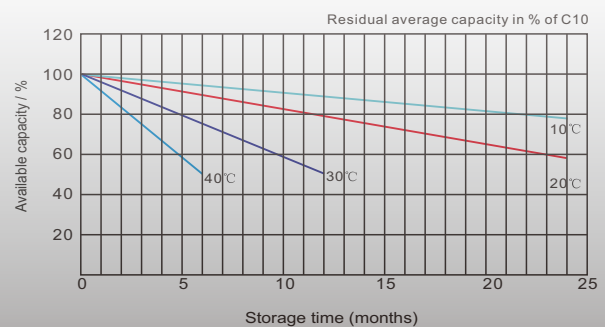

Sales Offices Worldwide

China Sales Office

5th Floor, Xinhaozhui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com

HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,
Tsuen Wan, New Territories, Hong Kong
Tel: +852 35786666
Fax: +44 1452 690125
E-mail: sales.hk@leoch.com

Singapore Sales Office

No. 1 Tech Park Crescent,
Singapore 638131
Tel: +65 68636078
Fax: +65 6863 6079
Email: sales.sg@Leoch.com

Australia Sales Office

2 /29 Tarlington Place, Smithfield. NSW 2164
Australia
Tel: 02 9756 0950
E-mail: sales.au@leoch.com

North America Sales Office

19751 Descartes
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us

UK Sales Office

9B Wheatstone Court. Waterwells, Business Park,
Gloucester, GL2-2AQ, UK United Kingdom
Tel: +44(0) 1452 729428 / 1452 729696
Fax: +44 1452 690125
E-mail: Sales.Europe@leoch.com

EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,
Greece
Tel: +30 210 5760318 (2 lines)
E-mail: support_EMEA@leoch.com

India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,
Bangalore North Taluk, Bangalore-560058, India
Tel: +91-80-23440018/23440019
Fax: +91-80-23440017
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

[Http://www.leoch.us](http://www.leoch.us)

© 2019 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.

Publication No.:LB-20 OPzV2500-C100-PD-EN-V1.2-202003