




BCI 31T-710 (12V95Ah)



Dimensions (mm)

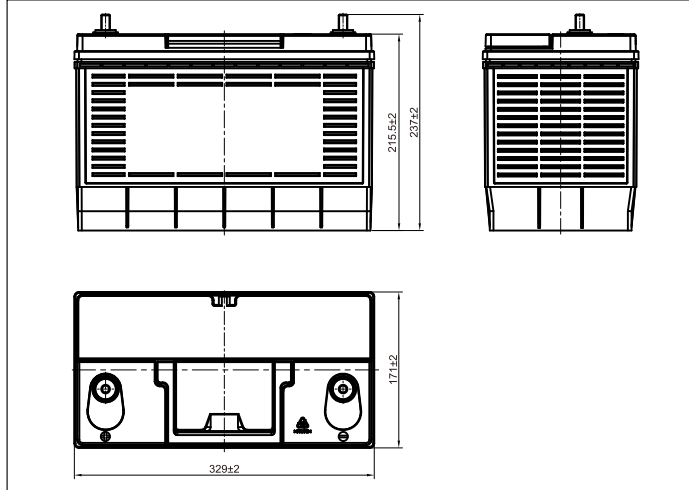


Physical Specification (mm)

Nominal Voltage	12V	
Nominal Capacity(20HR)	95Ah	
Dimension	Length	329±2mm(12.95inches)
	Width	171±2mm(6.73inches)
	Container Height	215.5±2mm(8.48inches)
	Total Height(with Terminal)	237±2mm(9.33inches)
Weight	Approx 23.6Kg(52.0lbs)	
Acid	1.280±0.015g/cm ³ (25°C)	
Standard Terminal	13	
Cell layout	1	
Hold-Down	B0	
Cell plate qty	/	
Case	Black-PP Material	
Cover	Black-PP Material	
Handle	Black-PP Material	
QTY/PLT/layer	/	

Electrical Specification

Rated Capacity	20 hour rate(4.75A)	95Ah
Reserve Capacity	169min	
Cold Cranking Performance Amps@0°F(-18°C)	710A	


Discharge Characteristics(25°C,70°F)

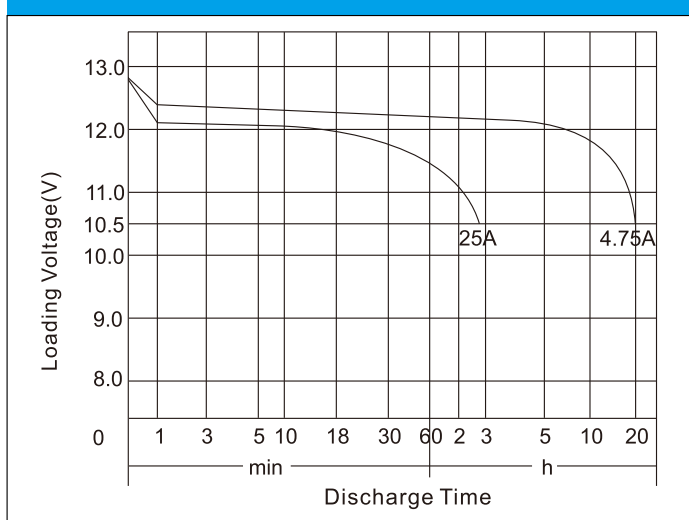

Standard Terminal (mm) Cell Layout

Terminal Type	13	<p>Figure(1)</p>

Discharge Characteristics(-18°C,0°F)

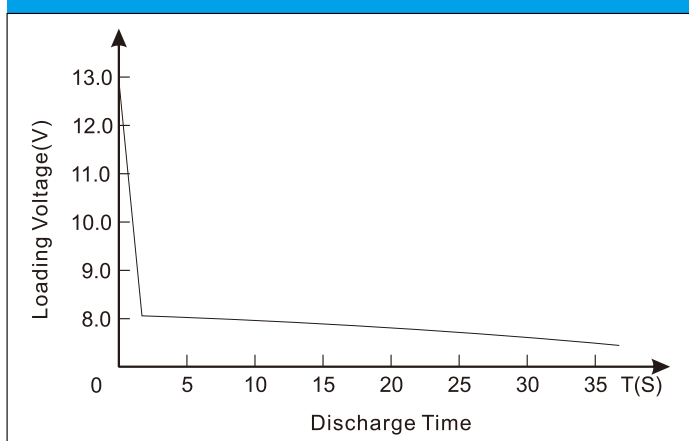

*Values are subject to variation of +/- 5% in normal manufacturing processes.
 *Technical specifications and the product line above could be changed without prior notice.