



# 55530 (12V55Ah)



## Physical Specification (mm)


Nominal Voltage		12V
Nominal Capacity(20HR)		55Ah
Dimension	Length	242 +0/-2mm(9.53inches)
	Width	175 +0/-2mm(6.89inches)
	Container Height	190 +0/-3mm(7.48inches)
	Total Height(with Terminal)	190 +0/-3mm(7.48inches)
Weight		Approx 14.5Kg(31.97lbs)
Acid		1.280±0.015g/cm <sup>3</sup> (25°C)
Standard Terminal		1
Cell layout		0
Hold-Down		B13
Cell plate qty		/
Case		Black-PP Material
Cover		Black-PP Material
Handle		Black-PP Material
QTY/PLT/layer		/

## Standard Terminal (mm)      Cell Layout

Terminal Type	D		Diagram
	Positive	Negative	
1	19.5 <sup>0</sup> <sub>-0.3</sub>	17.9 <sup>0</sup> <sub>-0.3</sub>	<p>Figure(0)</p>

\*Values are subject to variation of +/- 5% in normal manufacturing processes.  
 \*Technical specifications and the product line above could be changed without prior notice.


## Dimensions (mm)

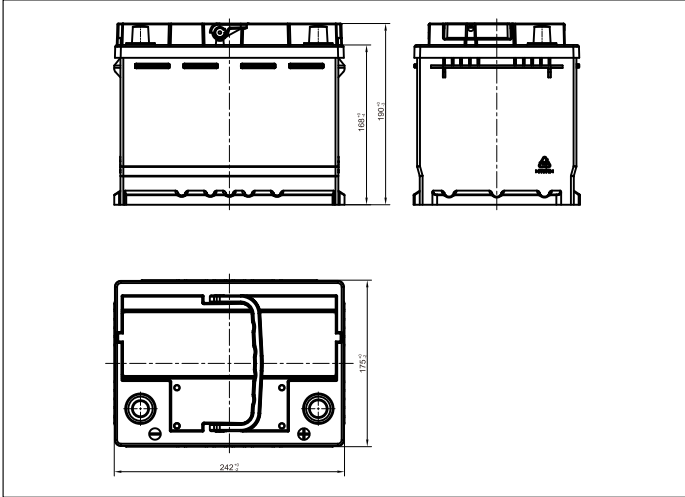

## Electrical Specification

Rated Capacity	20 hour rate(2.75A)	55Ah
Reserve Capacity		88min
Cold Cranking Performance Amps@0°F(-18°C)		500A

## Discharge Characteristics(25°C,70°F)

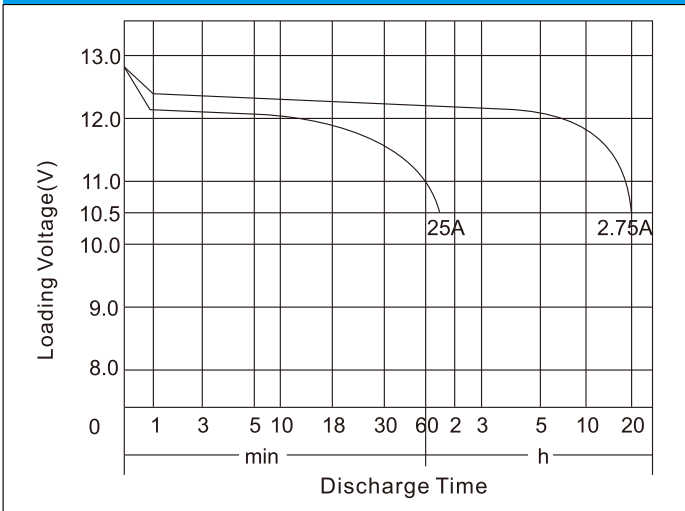

## Discharge Characteristics(-18°C,0°F)

