




# 56420 (12V65Ah)



## Dimensions (mm)

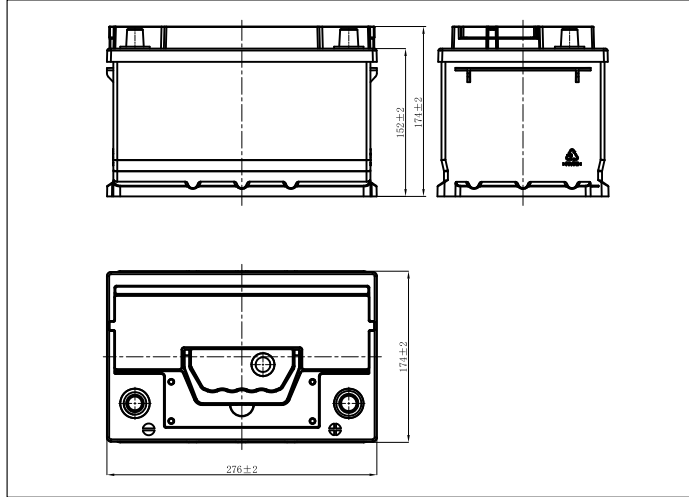


## Physical Specification (mm)

Nominal Voltage	12V	
Nominal Capacity(20HR)	65Ah	
Dimension	Length	276±2mm(10.87inches)
	Width	174±2mm(6.85inches)
	Container Height	174±2mm(6.85inches)
	Total Height(with Terminal)	174±2mm(6.85inches)
Weight	Approx 16.0Kg(35.3lbs)	
Acid	1.280±0.015g/cm <sup>3</sup> (25°C)	
Standard Terminal	1	
Cell layout	0	
Hold-Down	B13	
Cell plate qty	/	
Case	Black-PP Material	
Cover	Black-PP Material	
Handle	Black-PP Material	
QTY/PLT/layer	/	

## Electrical Specification

Rated Capacity	20 hour rate(3.25A)	65Ah
Reserve Capacity	108min	
Cold Cranking Performance Amps@0°F(-18°C)	570A	

## Discharge Characteristics(25°C,70°F)

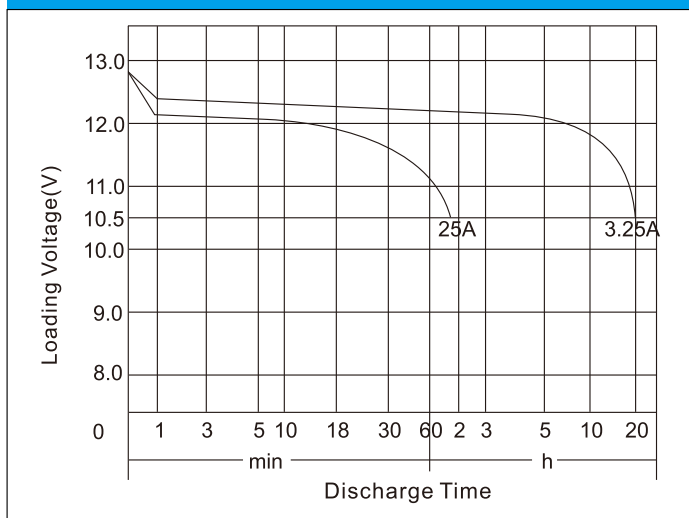


## Standard Terminal (mm)      Cell Layout

Terminal Type	D	
	Positive	Negative
1	19.5 <sup>0</sup> <sub>-0.3</sub>	17.9 <sup>0</sup> <sub>-0.3</sub>

Figure(0)

## Discharge Characteristics(-18°C,0°F)

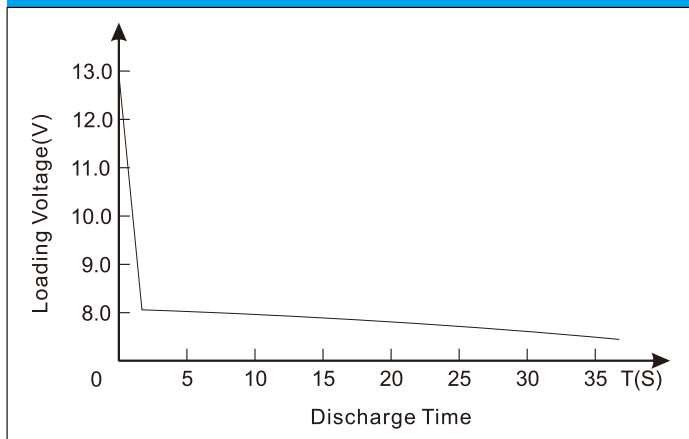

\*Values are subject to variation of +/- 5% in normal manufacturing processes.  
 \*Technical specifications and the product line above could be changed without prior notice.