




## 6-QW-39(330)-R (12V39Ah)



### Dimensions (mm)

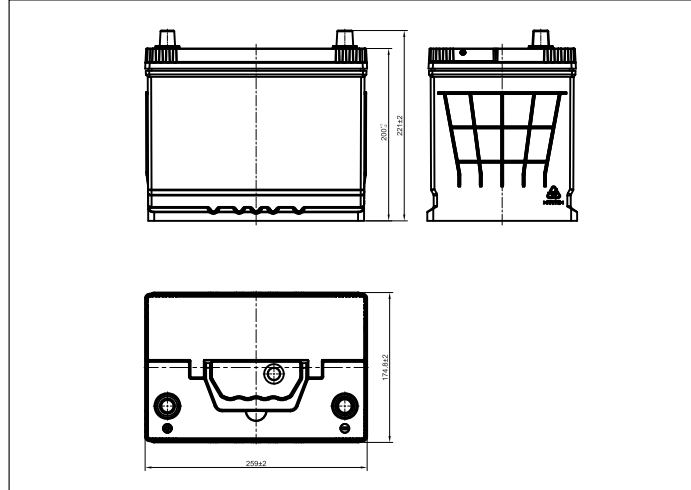


### Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		39Ah
Dimension	Length	259±2mm(10.20inches)
	Width	174.8±2mm(6.88inches)
	Container Height	200+1/-2mm(7.87inches)
	Total Height(with Terminal)	221±2mm(8.70inches)
Weight		Approx 14.1Kg(31.09lbs)
Acid		1.280±0.015g/cm <sup>3</sup> (25°C)
Standard Terminal		1
Cell layout		1
Hold-Down		B1
Cell plate qty		/
Case		Black-PP Material
Cover		Black-PP Material
Handle		Black-PP Material
QTY/PLT/layer		/


### Electrical Specification

Rated Capacity	20 hour rate(1.95A)	39Ah
Reserve Capacity		59min
Cold Cranking Performance Amps@0°F(-18°C)		330A


### Discharge Characteristics(25°C,70°F)

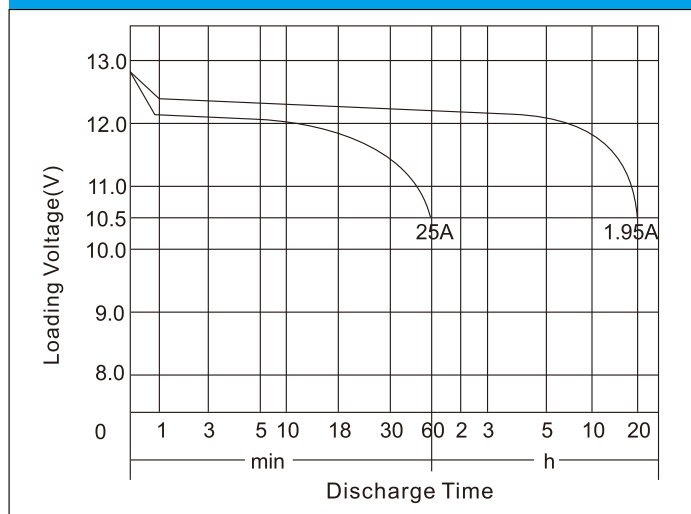


### Standard Terminal (mm)      Cell Layout

Terminal Type	D		Cell Layout
	Positive	Negative	
1	19.5 <sup>0</sup> <sub>-0.3</sub>	17.9 <sup>0</sup> <sub>-0.3</sub>	

Figure(1)

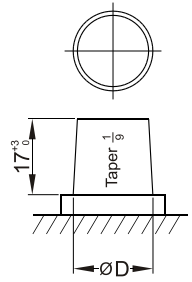

### Discharge Characteristics(-18°C,0°F)

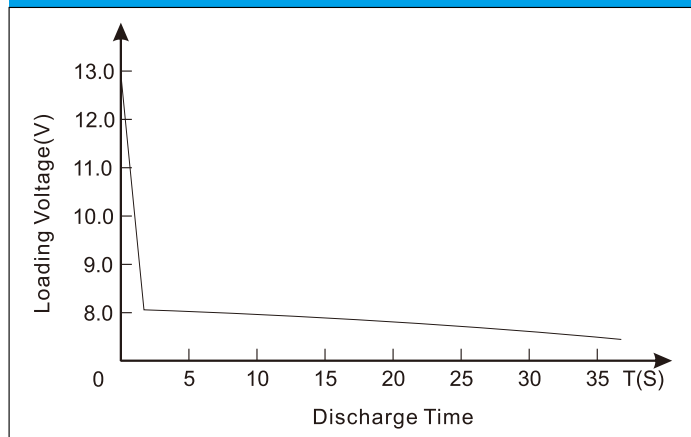

\*Values are subject to variation of +/- 5% in normal manufacturing processes.  
 \*Technical specifications and the product line above could be changed without prior notice.