




Physical Specification

Nominal Voltage	6V
Nominal Capacity(20HR)	312Ah
Nominal Capacity(5HR)	271Ah
Length	295±2mm(11.61inches)
Width	180±2mm(7.09inches)
Container Height	346±2mm(13.62inches)
Total Height	368±2mm(14.49inches)
Wet Weight	Approx48.2Kg(106.3lbs)
Standard Terminal	LPT-B
Container Material	PP



Terminal	
Positive	19.5 ⁰ _{-0.3}
Negative	17.9 ⁰ _{-0.3}


Charge Method
Constant voltage charging at 20°C (68°F)

Type	Standby use	Cyclic use
Max.Charge Current	0.25C ₁₀ A	0.25C ₁₀ A
Charge Voltage	6.8~6.9V	7.2~7.35V
Temperature Compensation	-10mV/°C	-15mV/°C

Electrical Specification(20°C , 68°F)

Rated Capacity	20hourrate(15.6A)	312Ah
	5hourrate(54.2A)	271Ah
Reserve Capacity	25Amps	736min
	75Amps	208min

Discharge Characteristics(20°C , 68°F)

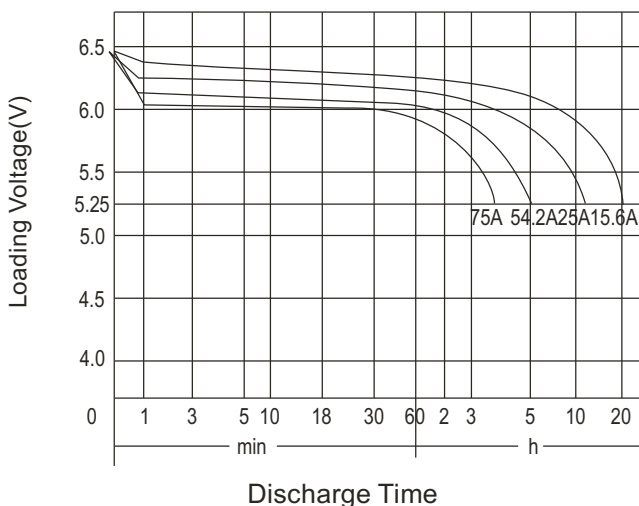

Cycle life in relation to depth of discharge

