





# GF6210D(6V210AH)

## Physical Specification

Nominal Voltage	6V
Nominal Capacity(20HR)	210Ah
Nominal Capacity(5HR)	175Ah
Length	260±2mm(10.24inches)
Width	180±2mm(7.09inches)
Container Height	252±2mm(9.92inches)
Total Height	274±2mm(10.79inches)
Wet Weight	Approx27.0Kg(59.53lbs)
Standard Terminal	DT-5/16
Container Material	PP




## Charge Method Constant voltage charging at 20°C (68°F)

Type	Standby use	Cyclic use
Max.Charge Current	0.25C <sub>10</sub> A	0.25C <sub>10</sub> A
Charge Voltage	6.8~6.9V	7.2~7.35V
Temperature Compensation	-10mV/°C	-15mV/°C

## Electrical Specification(20°C , 68°F)

Rated Capacity	20 hour rate(10.5A)	210Ah
	5 hour rate(35A)	175Ah
Reserve Capacity	25Amps	460min
	75Amps	120min

## Discharge Characteristics(20°C , 68°F)

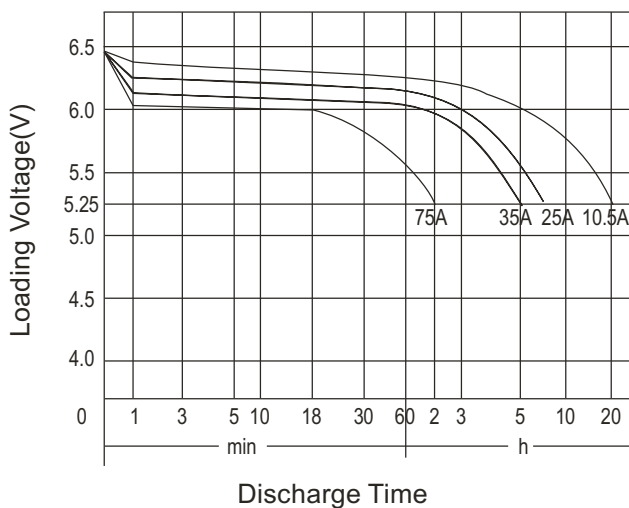

## Cycle life in relation to depth of discharge

