

# Lithium Iron Phosphate (LiFePO4) Battery LFeLi-1207M (12.8V7.0Ah)

# Features Of LiFePO4 Battery

**Longer Cycle Life**: Offers up to 20 times longer cycle life and five times longer float/calendar life than lead acid battery, helping to minimize replacement cost and reduce total cost of ownership.


**Lighter Weight**: About 40% of the weight of a comparable lead acid battery. A 'drop in' replacement for lead acid batteries.

**Higher Power**: Delivers twice power of lead acid battery, even high discharge rate, while maintaining high energy capacity.

Wider Temperature Range: -20°C~60°C.

**Superior Safety**: Lithium Iron Phosphate chemistry eliminates the risk of explosion or combustion due to high impact, overcharging or short circuit situation.

## **Physical Dimension-mm**





# Typical Applications

- Wheelchairs and scooters
- Solar/wind energy storage
- Back-up power for small UPS
- Golf trolleys & buggies
- Electric bikes
- Tools

# **Specification**


Electrical Characteristics	Nominal Voltage	12.8V
	Nominal Capacity	7.0Ah
	Energy	89.6Wh
	Internal Resistance(AC)	≪60m Ω
	Cycle Life	>2000 cycles @1C 100%DOD
	Months Self Discharge	<3%
	Efficiency of Charge	100% @0.5C
	Efficiency of Discharge	96~99% @1C
Standard Charge	Charge Voltage	14.6±0.2V
	Charge Mode	0.2C to 14.6V, then 14.6V, charge current to
	Charge Current	4.0A
	Max. Charge Current	7.0A
	Charge Cut-off Voltage	14.6V±0.2V
Standard Discharge	Rated Discharge Current	4.0A
	Max. Discharge Current	7.0A
	Discharge Cut-off Voltage	10.0V
Environmental	Charge Temperature	0 $^\circ\!\!\mathrm{C}$ to 55 $^\circ\!\!\mathrm{C}$ (32F to 131F) $@60{\pm}25\%$ Relative Humidity
	Discharge Temperature	–20 $^\circ \!\!\! C$ to 60 $^\circ \!\!\! C$ (–4F to 140F) $@60{\pm}25\%$ Relative Humidity
	Storage Temperature	–20 $^\circ \!\!\! C$ to 40 $^\circ \!\!\! C$ (-4F to 113F) $@60{\pm}25\%$ Relative Humidity
	IP Class	IP65
Mechanical	Plastic Case	ABS
	Approx. Dimensions	151mm*65mm*99mm (5.95in.*2.56in.*3.90in.)
	Approx. Weight	0.93kg (2.05lbs)
	Terminal	Т2






# Lithium Iron Phosphate (LiFePO4) Battery LFeLi-1207M (12.8V7.0Ah)

### **Different Temperature Discharge Curve(0.5C)**

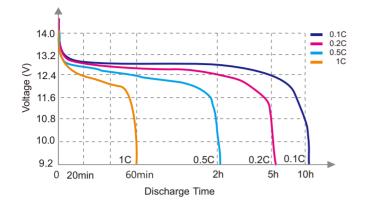



Different Rate Discharge Curve(25°C)

#### State of Charge Curve(0.5C, 25°C)

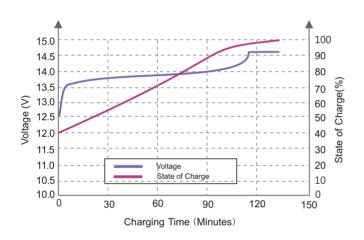


### Different DOD Discharge Cycle Life Curve(1C)

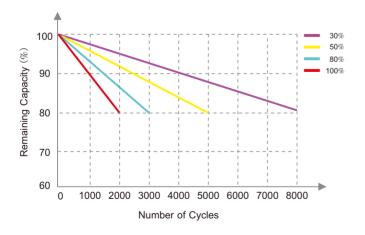




#### Charging Characteristics(0.5C, 25°C)



#### **Different Temperature Self Discharge Curve**



Publication No :LB-LFeLi-1207M-PD-EN-V3.0-202004

© 2020 LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted Subject to revisions without prior notice.



Http//:www.leoch.com

Libattery@leoch.com

Leoch International Technology Limited

Add:5th Floor, Xinbaohui Bldg., Nanhai Blvd, Nanshan, Shenzhen, China. 518054

