


Starter batteries for motorcycles

LFPS-X20H [12.8V7Ah]

Physical Specification

Nominal Voltage		12.8V
Nominal Capacity (10Hr)		7Ah
Dimension	Length	175 ± 2mm (6.89 inches)
	Width	87 ± 2mm (3.43 inches)
	Container Height	130 ± 2mm (5.12 inches)
	Total Height (with Terminal)	130 ± 2mm (5.12 inches)
Weight	Approx 1.12kg (2.47lbs)	

- * Motorcycle Li-ion battery
- * Maintenance-free
- * Powerful 420 cranking amps
- * Shipped pre-charged and ready to install
- * Replaces GYZ20H/YTX20H-BS/YTX20-BS/YB16-B-CX/YB16-B/YB18-A/Y50-N18A-A battery

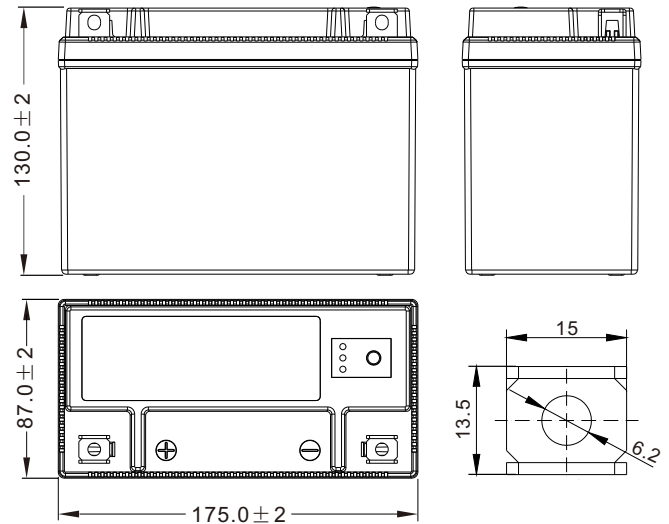



Dimensions (mm)

Electrical Specification

Rated Capacity	0.1C rate (0.70A)	7.00Ah
	0.5C rate (3.50A)	7.00Ah
	10C rate (70.00A)	6.30Ah
	20C rate (140.00A)	6.30Ah
	30C rate (210.00A)	5.60Ah
Capacity affected by Temperature	40 °C (104 °F)	98%
	25 °C (77 °F)	100%
	0 °C (32 °F)	85%
	-20 °C (-4 °F)	60%
Self Discharge	Approximately 1.5% per month (25°C (77°F))	
Charging Methods	Constant-Voltage Charge:	
	Full Charge	Initial charging current: less than 3.5A Voltage: 14.40 V ~ 14.60 V at 25 °C (77 °F)



Curve Specification

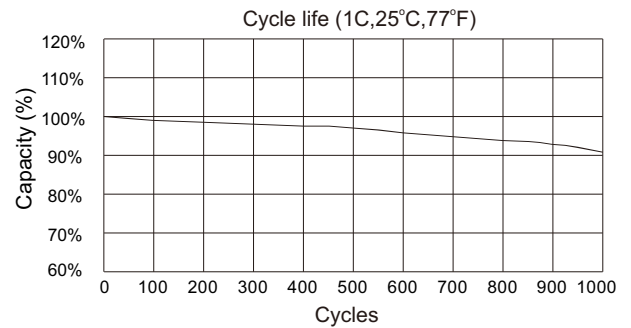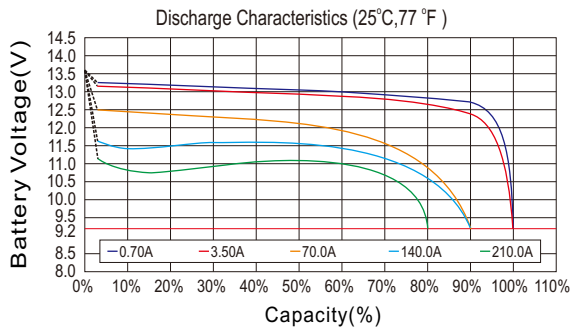

Publication No :LB-LFPS-X20H-PD-EN-V1.2-201805

