


Starter batteries for motorcycles

LFPS-Z10S [12.8V4Ah]

Physical Specification

| | | |
|-------------------------|------------------------------|-------------------------|
| Nominal Voltage | | 12.8V |
| Nominal Capacity (10Hr) | | 4Ah |
| Dimension | Length | 150 ± 2mm (5.91 inches) |
| | Width | 87 ± 2mm (3.43 inches) |
| | Container Height | 93 ± 2mm (3.66 inches) |
| | Total Height (with Terminal) | 93 ± 2mm (3.66 inches) |
| Weight | Approx 0.70kg (1.54lbs) | |

- * Motorcycle Li-ion battery
- * Maintenance-free
- * Powerful 280 cranking amps
- * Shipped pre-charged and ready to install
- * Replaces YTZ10S battery

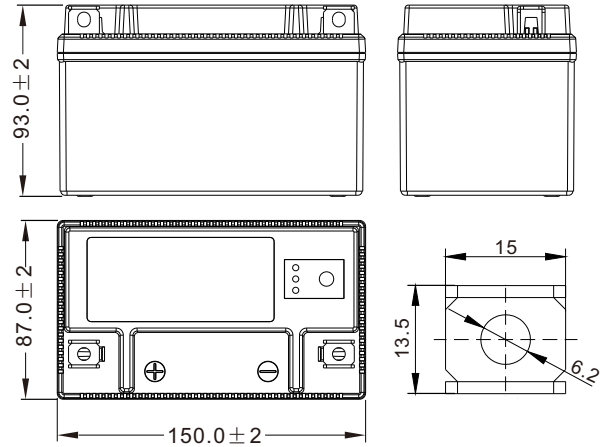



Dimensions (mm)

Electrical Specification

| | | |
|----------------------------------|--|---|
| Rated Capacity | 0.1C rate (0.4A) | 4Ah |
| | 0.5C rate (2.0A) | 4Ah |
| | 10C rate (40.0A) | 3.6Ah |
| | 20C rate (80.0A) | 3.6Ah |
| | 30C rate (120.0A) | 3.2Ah |
| Capacity affected by Temperature | 40 °C (104 °F) | 98% |
| | 25 °C (77 °F) | 100% |
| | 0 °C (32 °F) | 85% |
| | -20 °C (-4 °F) | 60% |
| Self Discharge | Approximately 1.5% per month (25 °C (77 °F)) | |
| Charging Methods | Full Charge | Constant-Voltage Charge: Initial charging current: less than 2.0A Voltage: 14.40 V ~ 14.60 V at 25 °C (77 °F) |



Curve Specification

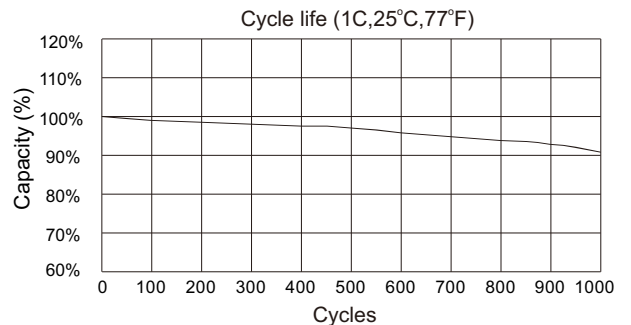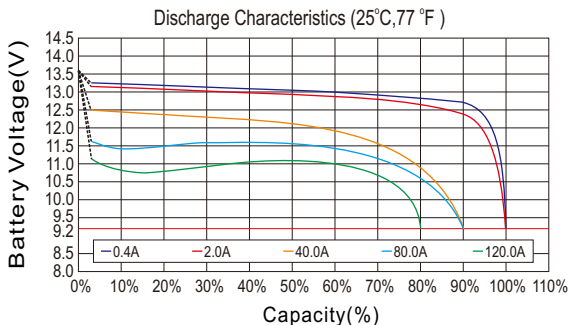

Publication No :LB-LFPS-Z10S-PD-EN-V1.3-201805

