





# LP Series-General Purpose LP12-70(12V70Ah)

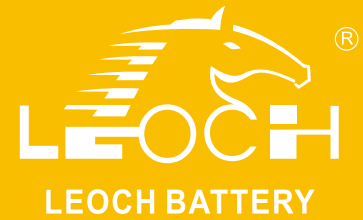


## Specifications

Rated Voltage	12V	
Nominal Capacity	70.0Ah	(C <sub>10</sub> , 1.80V/cell)
Dimension	Length	348±2mm (13.7 inches)
	Width	167±2mm (6.57 inches)
	Container Height	178±2mm (7.01 inches)
	Total Height	178±2mm (7.01 inches)
Approx Weight	21.4 Kg (47.26 lbs)	
Terminal	M6	
Container Material	ABS	
Rated Capacity (25°C)	73.6 Ah	(20hr, 3.68A, 1.80V/cell)
	70.0 Ah	(10hr, 7.00A, 1.80V/cell)
	63.5 Ah	(5hr, 12.7A, 1.75V/cell)
	57.9 Ah	(3hr, 19.3A, 1.75V/cell)
	44.6Ah	(1hr, 44.6A, 1.60V/cell)
Max. Discharge Current	700A (5s)	
Internal Resistance (25°C)	Approx 6.6mΩ	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	-20 ~ 40°C (-4 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 21.0A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
	Initial Charging Current less than 21.0A. Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	LP series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	

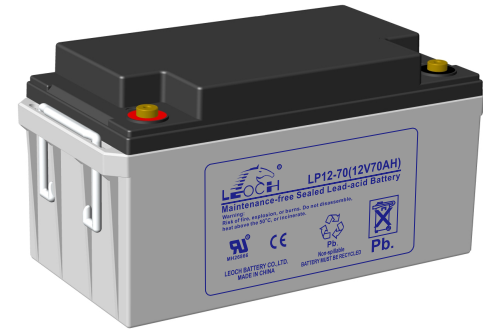

## Layout

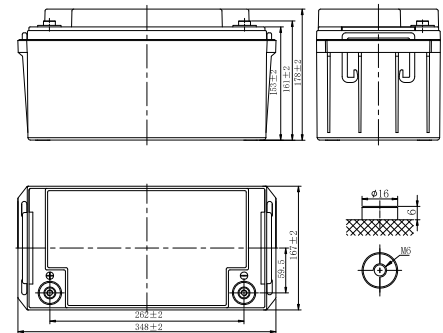

## Constant Current Discharge (Amperes) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	139.8	99.4	89.8	70.6	63.1	46.2	39.1	28.3	23.8	17.5	13.7	11.9	10.5	8.07	6.69	3.55
1.80V/cell	159.0	112.8	101.7	79.8	68.7	48.9	40.5	29.3	24.6	19.0	14.6	12.5	11.3	8.49	7.00	3.68
1.75V/cell	172.7	122.4	110.2	86.2	70.1	50.7	42.5	30.8	25.9	19.3	14.9	12.7	11.4	8.53	7.07	3.71
1.70V/cell	184.6	130.5	117.0	91.4	71.5	51.7	43.4	31.4	26.4	19.7	15.2	13.0	11.4	8.66	7.14	3.75
1.67V/cell	191.1	134.6	120.4	93.9	72.6	52.5	44.0	31.9	26.8	19.9	15.4	13.2	11.5	8.79	7.23	3.80
1.60V/cell	197.8	139.2	124.1	96.3	73.6	53.2	44.6	32.3	27.2	20.1	15.6	13.4	11.6	8.90	7.32	3.84

## Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	261.1	187.0	164.9	130.3	117.0	87.0	73.4	53.3	45.0	33.1	26.1	22.7	20.1	15.5	12.9	6.85
1.80V/cell	292.1	209.2	184.5	145.7	126.4	91.6	75.6	54.9	46.2	35.8	27.8	23.8	21.5	16.3	13.5	7.09
1.75V/cell	311.8	223.3	196.9	155.5	128.0	94.3	79.0	57.4	48.4	36.4	28.2	24.2	21.6	16.3	13.6	7.15
1.70V/cell	327.7	234.7	207.0	163.5	129.5	95.5	80.1	58.3	49.2	37.0	28.6	24.5	21.7	16.6	13.7	7.22
1.67V/cell	333.1	238.6	210.3	166.2	130.4	96.4	80.8	58.9	49.7	37.1	28.9	24.9	21.7	16.8	13.9	7.30
1.60V/cell	337.7	241.9	213.3	168.5	130.9	96.9	81.4	59.3	50.1	37.3	29.1	25.1	21.8	16.9	14.0	7.37



# LP Series-General Purpose LP12-70(12V70Ah)

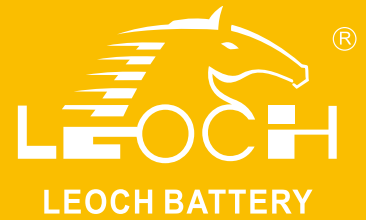

## Applications

- All purpose
- Uninterruptable Power Supply (UPS)
- Electric Power System (EPS)
- Emergency backup power supply
- Alarm and security system
- Communication power supply
- DC power supply
- Auto control system


## General Features

- 8 years design life(25°C)
- Special exhaust structure and sealing technology, safe and reliable, flexible installation, convenient maintenance
- PbCaSn alloy for plate grids: less gassing, less self-discharging
- High quality AGM separator: extend cycle life and prevent micro short circuit
- High purity raw material: ensure low self discharge rate


## Standards

- Compliance with IEC 60896 standards, EU Battery Directive
- UL, CE Certified
- Manufactured in Leoch®IATF 16949, ISO45001, ISO 9001 and ISO 14001 certified production facilities


## Discharge Characteristics

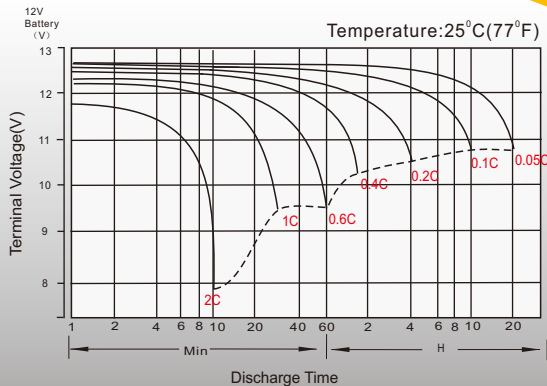


## Float Charging Characteristics

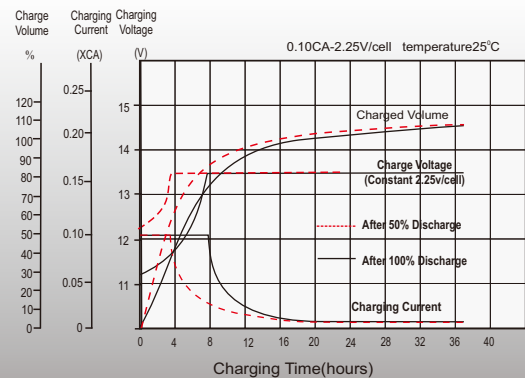

## Temperature Effects in Relation to Battery Capacity

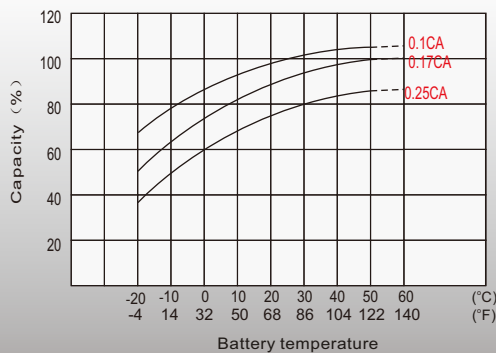

## Float Service Life

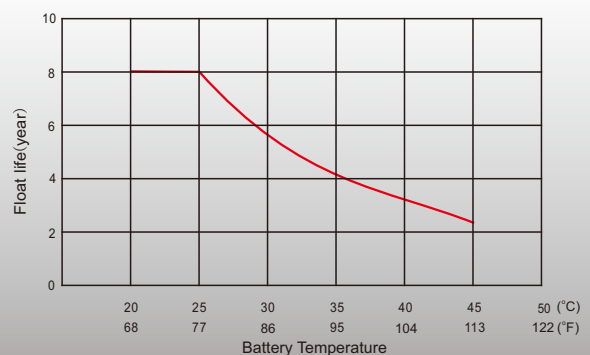

## Sales Offices Worldwide

### China Sales Office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,  
Nanshan, Shenzhen, China. 518052  
Tel: +86-755-86036060 (100 lines)  
Tel: +86-755-26067269  
Fax: +86-755-26067269  
E-mail: export@leoch.com

### HongKong Sales Office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,  
Tsuen Wan, New Territories, Hong Kong  
Tel: +852 35786666  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: sales.hk@leoch.com

### Singapore Sales Office

No. 1 Tech Park Crescent,  
Singapore 638131  
Tel: +65 68636078  
Tel: +65 6863 6079  
Fax: +65 6863 6079  
Email: sales.sg@Leoch.com

### Australia Sales Office

2 /29 Tarlington Place, Smithfield, NSW 2164  
Australia  
Tel: 02 9756 0950  
E-mail: sales.au@leoch.com

### North America Sales Office

19751 Descartes  
Foothill Ranch, CA 92610, USA  
Tel: 949-588-5853  
Tel: 949-588-5853  
Fax: 949-588-5966  
E-mail: sales@leoch.us  
Http:// www.leoch.us

### UK Sales Office

9B Wheatstone Court, Waterwells, Business Park,  
Gloucester, GL2-2AQ, UK United Kingdom  
Tel: +44(0) 1452 729428 / 1452 729696  
Tel: +44(0) 1452 729428 / 1452 729696  
Fax: +44 1452 690125  
E-mail: Sales.Europe@leoch.com  
Http:// www.leoch.eu

### EMEA Sales Office

1 Deligiorgi St., 121 31 Athens,  
Greece  
Tel: +30 210 5760318 (2 lines)  
Tel: +30 210 5760318 (2 lines)  
E-mail: support\_EMEA@leoch.com  
Http:// www.leoch.eu

### India Sales Office

Shed no.A-53(b), 2nd Stage of Peenya Industrial Area,  
Bangalore North Taluk, Bangalore-560058, India  
Tel: +91-80-23440018/23440019  
Tel: +91-80-23440018/23440019  
Fax: +91-80-23440017  
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)

© 2020 LEOCH. All rights reserved.

Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.  
Subject to revisions without prior notice.

Publication No.: LB-LP12-70-PD-EN-V2.0-202004