




6-QW-65(500)-L (12V65Ah)



Dimensions (mm)

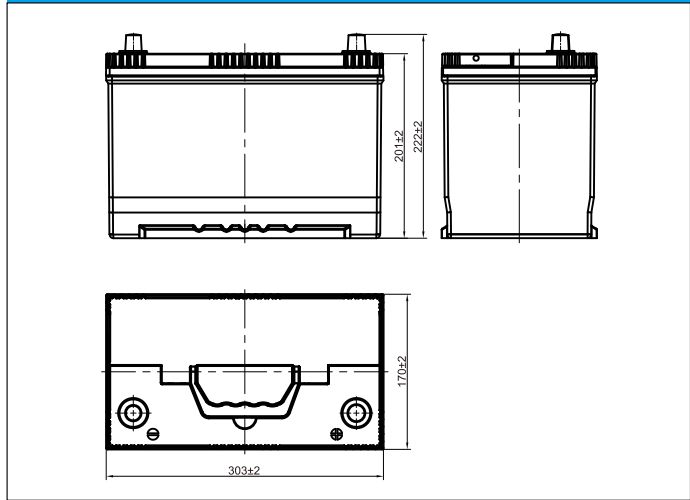


Physical Specification (mm)

Nominal Voltage		12V
Nominal Capacity(20HR)		65Ah
Dimension	Length	303±2mm(11.93inches)
	Width	170±2mm(6.69inches)
	Container Height	201±2mm(7.91inches)
	Total Height(with Terminal)	222±2mm(8.74inches)
Weight		Approx 18.5Kg(40.8lbs)
Acid		1.280±0.015g/cm ³ (25°C)
Standard Terminal		1
Cell layout		0
Hold-Down		B1
Cell plate qty		/
Case		Black-PP Material
Cover		Black-PP Material
Handle		Black-PP Material
QTY/PLT/layer		/

Electrical Specification

Rated Capacity	20 hour rate(3.25A)	65Ah
Reserve Capacity		108min
Cold Cranking Performance Amps@0°F(-18°C)		500A

Discharge Characteristics(25°C,70°F)

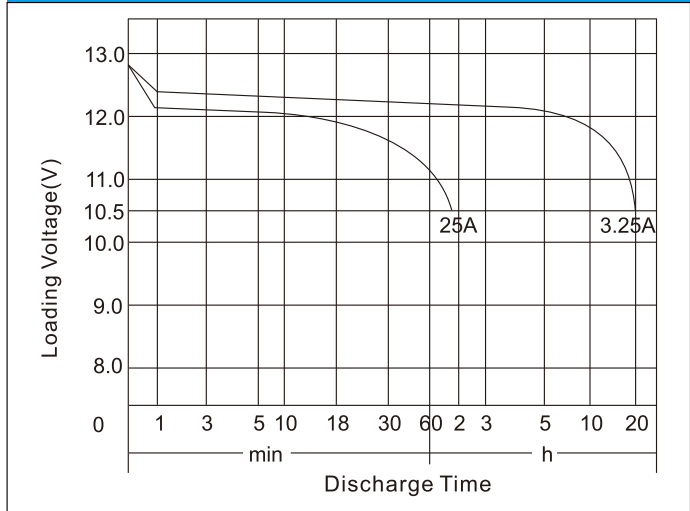


Standard Terminal (mm) Cell Layout

Terminal Type	D		Diagram
	Positive	Negative	
1	19.5 ⁰ _{-0.3}	17.9 ⁰ _{-0.3}	

Figure(0)

Discharge Characteristics(-18°C,0°F)

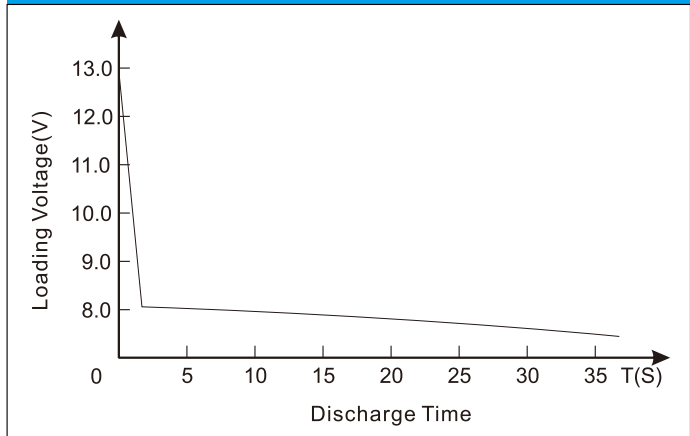

*Values are subject to variation of +/- 5% in normal manufacturing processes.
 *Technical specifications and the product line above could be changed without prior notice.